


2006 Codes


In Groups R-1, R-2, and R-4: When buildings have 4 or more dwelling or sleeping units intended to be occupied as residences, each of these units must be a Type B Unit. A minimum number and/or percentage of these units will be Type A Units per 2003 International Building Code (IBC) 1107.6.

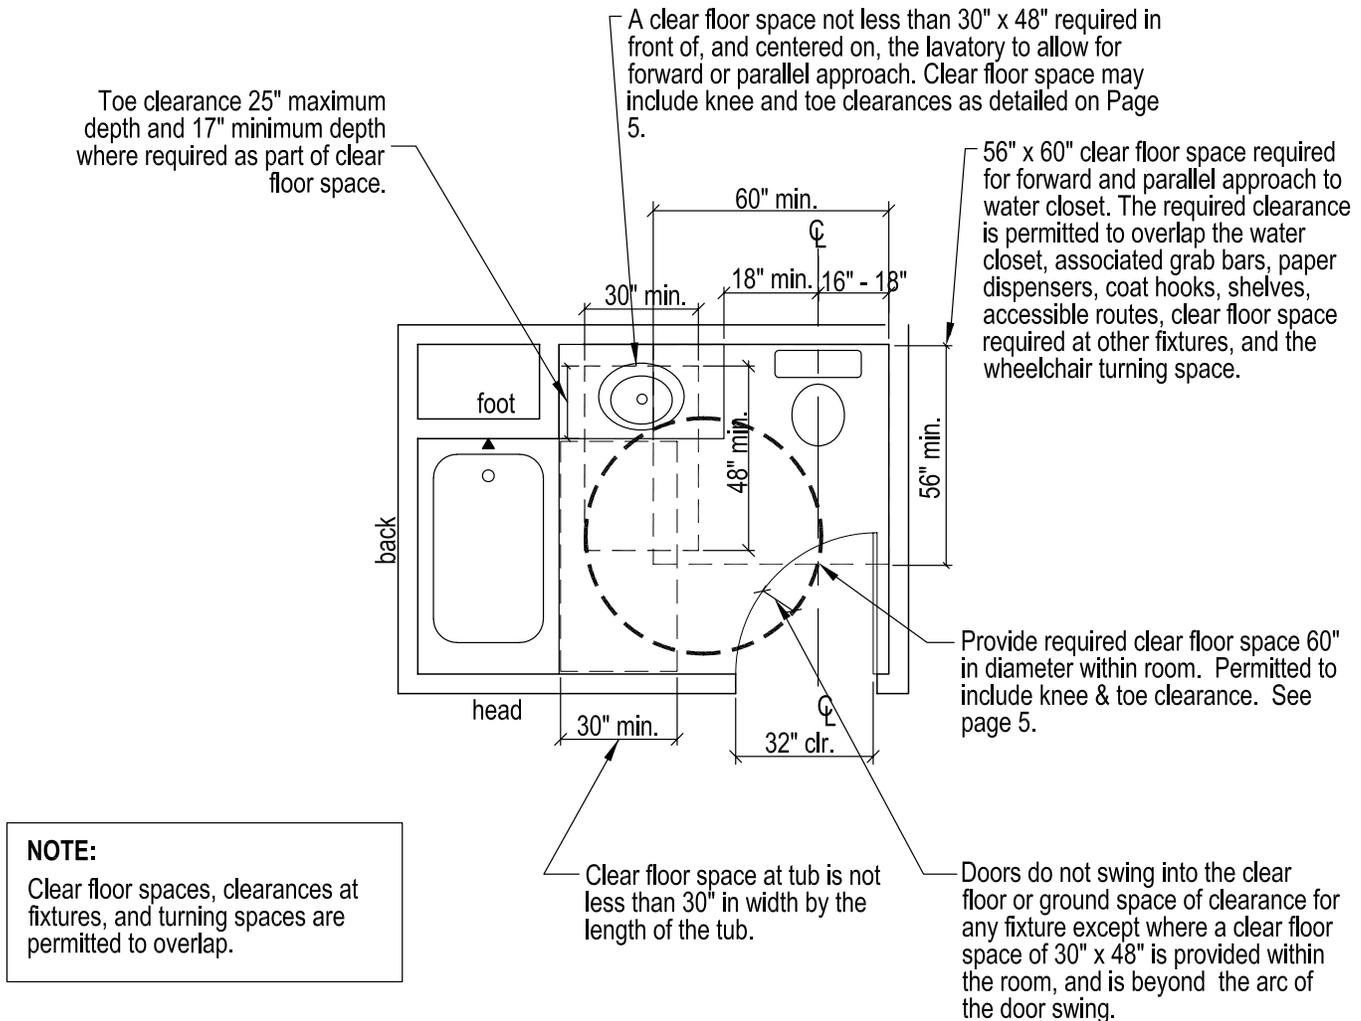


Type A Unit Floor Plan

GENERAL INFORMATION:


- Cabinets and shelving can be installed underneath counter space or lavatories provided that it can be removed without removal or replacement of the lavatory, the floor finish extends under such cabinetry, and the walls behind and surrounding the cabinetry are finished.
- All doors on accessible routes have a clear opening of 32" minimum, measured from the face of the door, when open 90% to the door stop. See Tip Sheet 14 Accessibility and Door Clearance.
- Thresholds, if provided, are 1/2" high, maximum.
- Grab bars: 1-1/4" to 2" in diameter, or the shape provides an equivalent gripping surface and is capable of supporting 250 lbs.
- For code requirements refer to:
 1. Chapter 11 of the 2003 IBC
 2. Appendix Chapter E, Sections E101 - E107
 3. ICC / ANSI A117.1 - 2003, as amended in IBC 1101.2

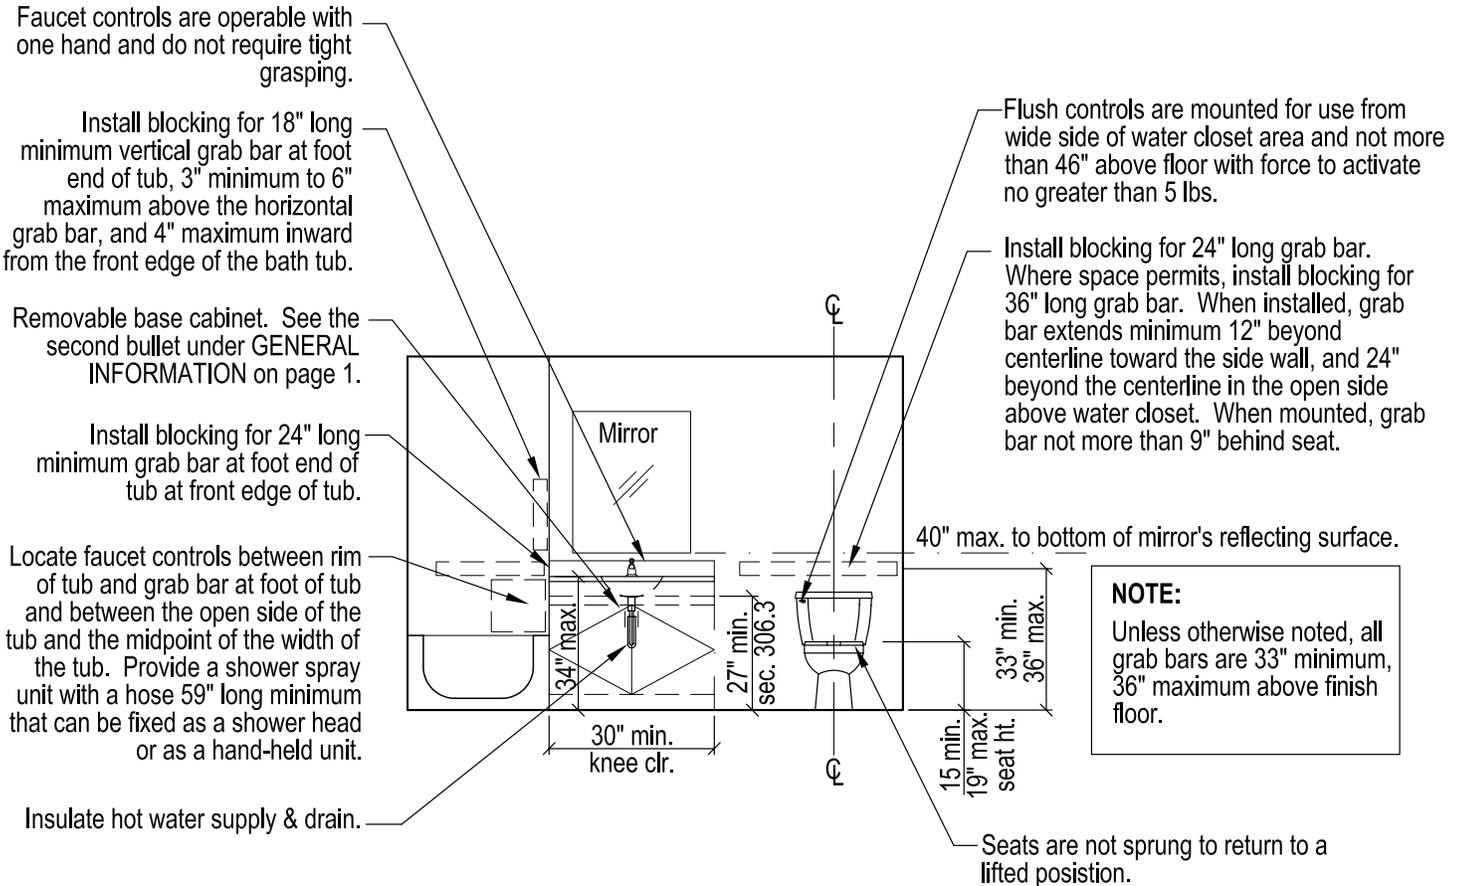


North Wall Interior Elevation (Bathtub Control end wall)

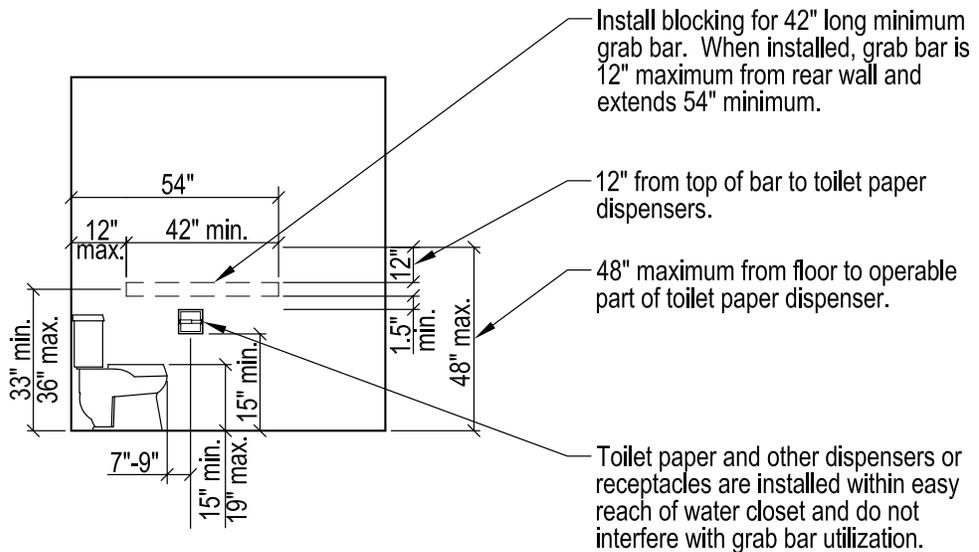

East Wall Interior Elevation

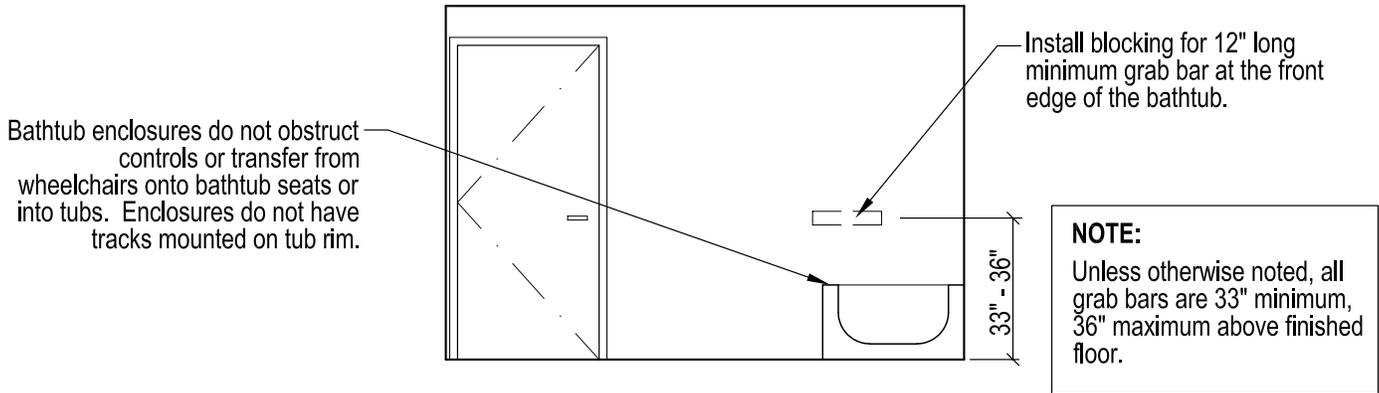

South Wall Interior Elevation (Bathtub Head end wall)

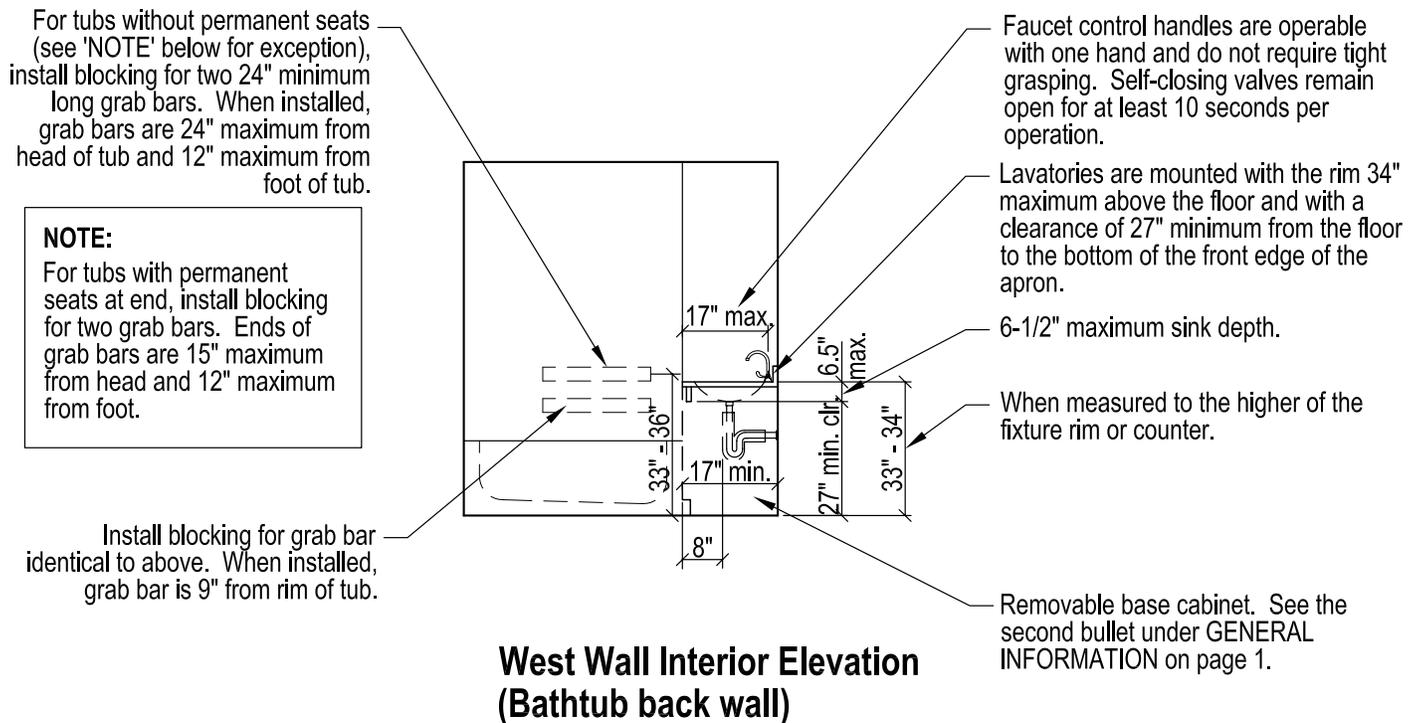

West Wall Interior Elevation (Bathtub back wall)

NOTE:
Countertop, doors, and floor finish not shown.


Similar detail applies at removable cabinets under sinks - provide 30" minimum clear width.

Cabinets are removable by removing these screws only.

Permanent cabinets


Separate cleat at wall to support countertop.

Install body of base cabinet with screws, independent of countertop, for easy removal.

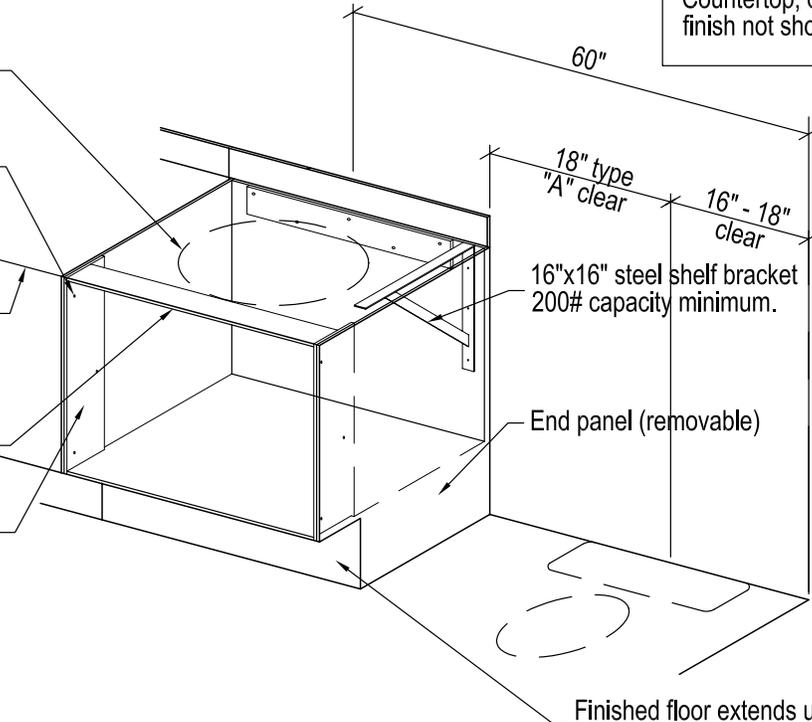

Cabinet Perspective

When measured to the higher of the fixture rim or counter.

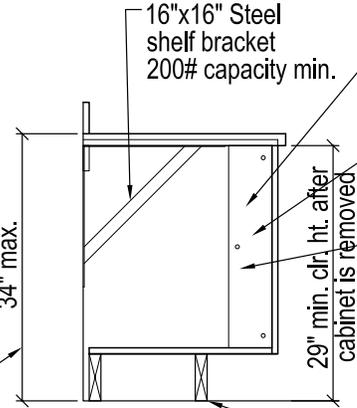


Cabinet Section

Install body of base cabinet with screws, independent of countertop for easy removal.


Screw to end panel & adjacent cabinet.

Partial cabinet supplied by manufacturer, including doors, top rail, side stile, and bottom.

Shim all cabinets in group to match floor finish height.

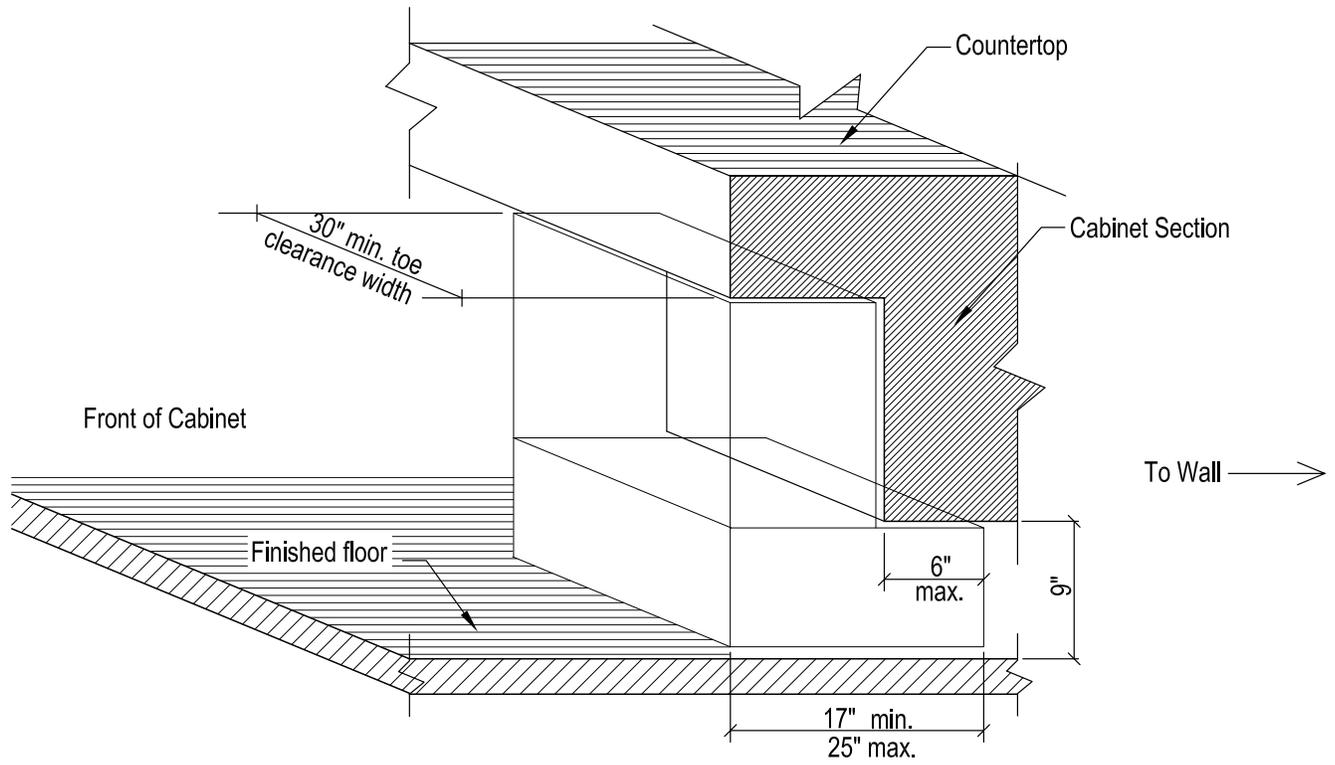

Toe Clearance

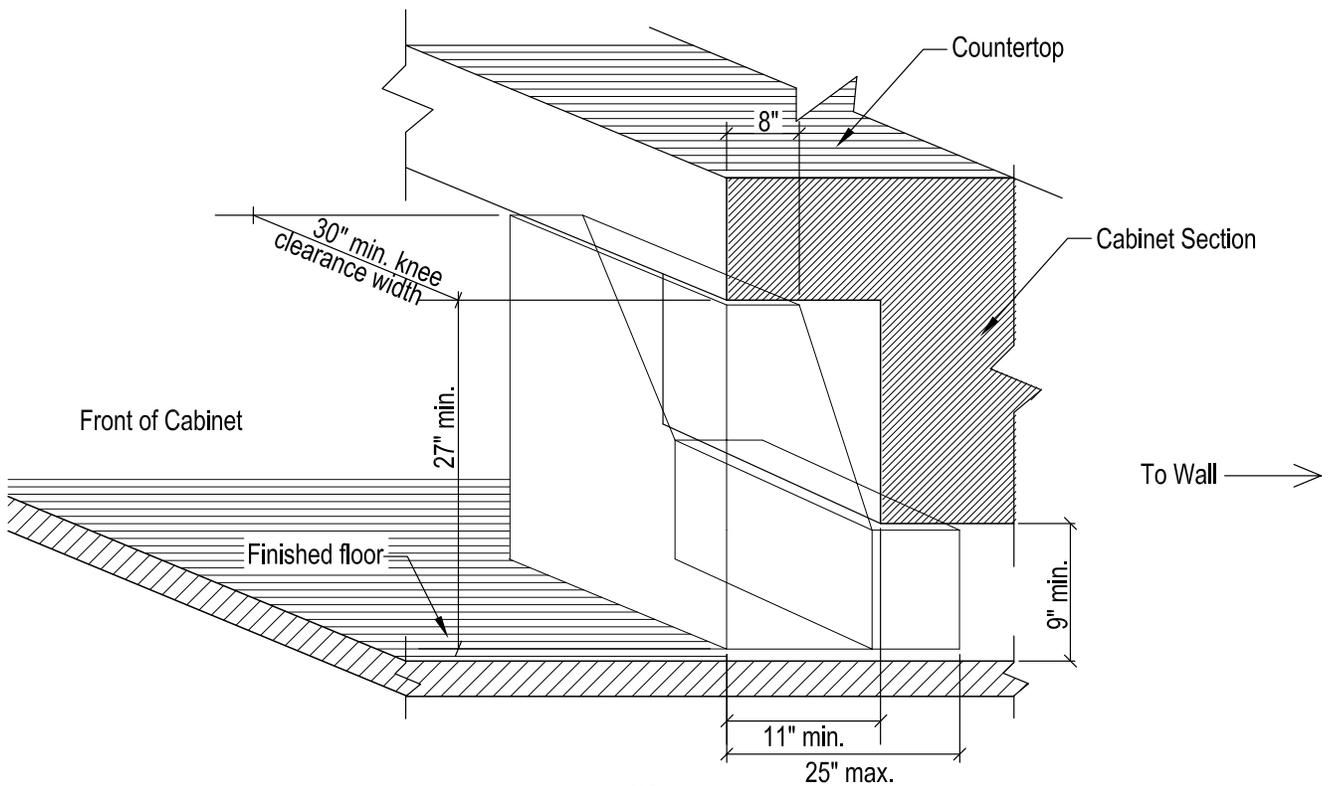

Knee Clearance